

"IT'S THE BEST OF  
SURFACE AND INGROUND  
LIFTS COMBINED!"

# EnviroLifts™

## CASSETTE Lifts

*"Eliminate environmental concerns  
associated with traditional inground lifts!"*

Challenger Lifts' New EnviroLift™  
Cassette-Style Electric Inground Lifts are  
fully contained in a sealed container to  
protect your investment and the environment.

Maximize the bays in your shop to increase  
your revenue potential with our leasable  
and relocatable EnviroLift™.

Call us at **800-648-5438!** Our national  
network of authorized distributors and  
installers will be glad to show you how to  
raise your service to full capacity.

*We don't just stand behind our products,  
we stand under them!™*




[www.challengerlifts.com](http://www.challengerlifts.com)

Uses only 12 qts  
of hydraulic fluid



*Shown:  
Model CS0920  
9,000 lbs. lifting  
capacity*

# EnviroLift™ Cassette Lifts - 9,000 lbs. Capacity

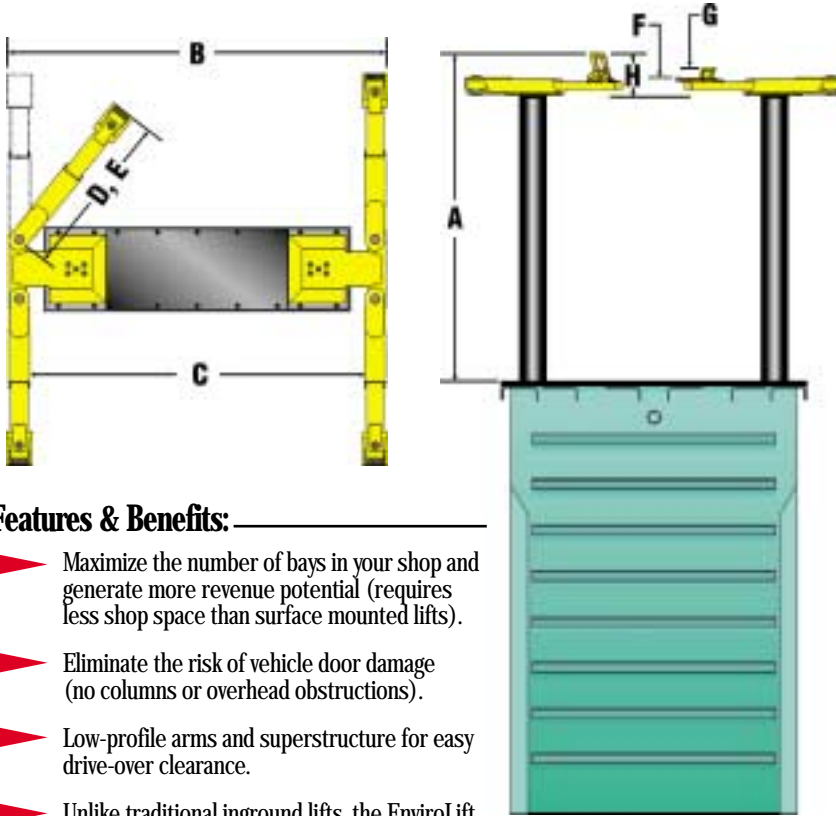

## Features & Benefits:


- ▶ Maximize the number of bays in your shop and generate more revenue potential (requires less shop space than surface mounted lifts).
- ▶ Eliminate the risk of vehicle door damage (no columns or overhead obstructions).
- ▶ Low-profile arms and superstructure for easy drive-over clearance.
- ▶ Unlike traditional inground lifts, the EnviroLift is removable, relocatable and leasable.
- ▶ Convenient 3" incremental air actuated lock system to raise vehicle at technician's ergonomic working height to minimize fatigue and increase productivity.

## Optional Adapter Accessories:

To accommodate a wider variety of vehicles, our optional pad or frame contact slip-on adapters give you the flexibility to raise just about any vehicle that comes in for service.



Slip-On Luxury Car Adapters (# 10300)

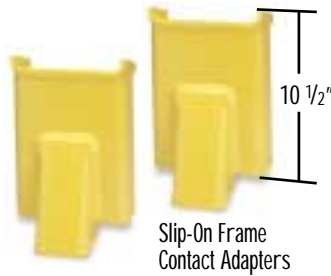

Slip-On Frame Contact Adapters (# VKL305)

For more information, contact your authorized Challenger Lift Distributor:

SPECIFICATIONS	Model: CS0920*
A. Rise Height**	78 <sup>3</sup> / <sub>16</sub> " (1986mm)
B. Width Overall	89 <sup>1</sup> / <sub>2</sub> " (2273mm)
C. Drive-Thru Clearance	79 <sup>1</sup> / <sub>2</sub> " (2019mm)
D. Reach (Arm Min.)	25 <sup>1</sup> / <sub>4</sub> " (641mm)
E. Reach (Arm Max.)	42" (1067mm)
F. Min. Adapter Height	4 <sup>3</sup> / <sub>16</sub> " (106mm)
G. Low Step Height	6 <sup>11</sup> / <sub>16</sub> " (170mm)
H. High Step Height	10 <sup>3</sup> / <sub>16</sub> " (259mm)
Lifting Capacity	9000 lbs. (4082kg)
Capacity (Per Arm)	2250 lbs. (1021kg)
Motor	2HP
Voltage (Single Phase Std.)***	208v-230v
Speed of Rise	48 Seconds
Air Required	75 - 125 psi
Min. Recommended Bay Size	10' x 20' (3048mm x 6096mm)
Recommended Ceiling Height	79" plus height of tallest vehicle

\* Standard models include a 3-position "flip-up" superstructure. "Screw-type" rubber pad superstructure models also available at NO EXTRA COST, please specify superstructure preference at time of order (see below).

\*\* Rise height is measured with "flip-up" superstructure in highest position.

\*\*\* Optional 3 phase electrical also available, please specify at time of order.

## MODEL DESCRIPTION

- CSPK - Universal Pre-Kit for all EnviroLift Models (CS0920, CS1220 and CS1520 Series)
- CS0920CK - Completion Kit for EnviroLift
- CS0920LS - EnviroLift Less Superstructure - for alignment purposes
- CS0920SSA - Asymmetric Superstructure Only - 3-position "flip-up"
- CS0920SSFP - Symmetric Superstructure Only - 3-position "flip-up"
- CS0920SSE - European Superstructure Only - 3-position "flip-up"
- CS0920SSRP - Symmetric Superstructure Only - "screw-type" rubber pad



The Automotive Lift Institute (ALI) certifies that the CS0920 Series described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV-1998 and are Third Party Validated by the ETL Testing Laboratory.

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.

Attractive Lease Programs Available.  
GSA CONTRACT # GS-O7F-8950D • CAGE CODE OKD44  
SIN#s 253-23, 253-23A, 253-38 • DUNS# 79-435-3680



Lit# CS0920 12/02  
©2002, Challenger Lifts, Inc.

Major Credit and Debit Cards Accepted



CHALLENGER LIFTS, INC.  
200 Cabel Street  
Louisville, Kentucky 40206  
Phone Toll-Free: 800-648-5438  
502-625-0700  
Fax: 502-625-0711  
E-mail: sales@challengerlifts.com



www.challengerlifts.com