

4015


SITE SPECIFICATIONS

- **BAY HEIGHT:** 78" rise plus vehicle
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended / 26' rec. for extended models
- **POWER REQ.:** 208-230v Single Phase*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- **AIR REQUIRED:** 90-120 psi



SERVICE BAY LAYOUT

4015 EFO/XFO shown

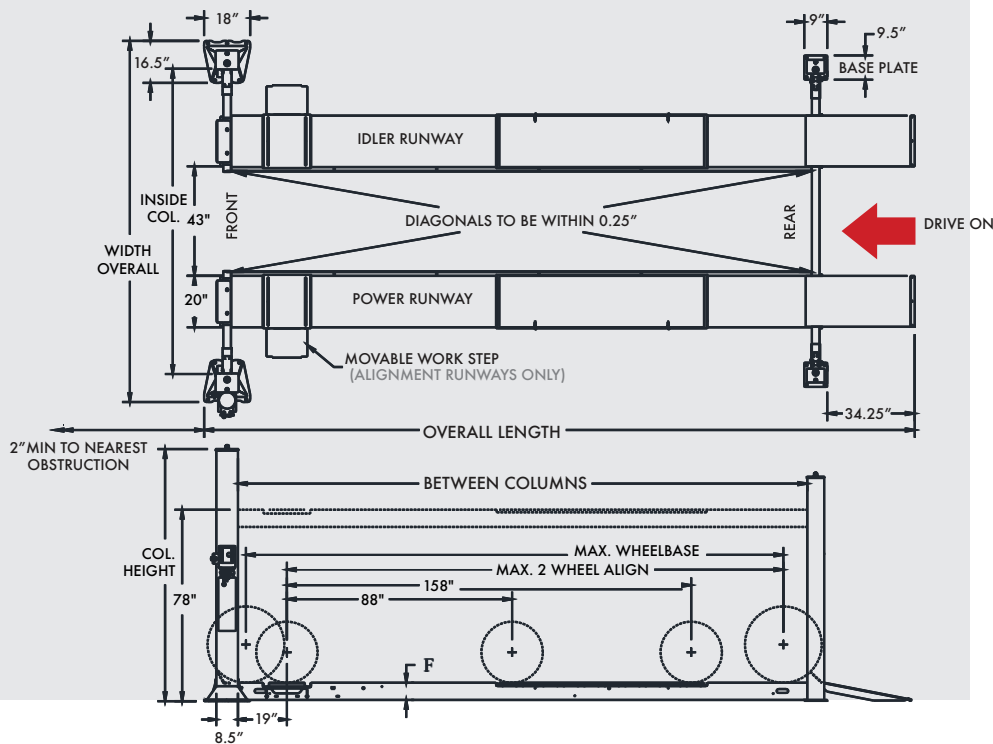

| Model Number | 4015EFO | 4015XFO | 4015EFX | 4015XFX |
|-----------------------|---------------------------|-----------|-----------|-----------|
| Lifting Capacity | 15,000 lbs. | | | |
| Front | Open | | Closed | |
| Max. Wheelbase | 182.5" | 210" | 182.5" | 210" |
| Rise Height | 78" | | | |
| Overall Length | 250.25" | 277.25" | 245.75" | 273.25" |
| Overall Width | 142" front / 134.25" rear | | 134.5" | |
| Inside Columns | 120" | | | |
| Between Columns | 195" | 222.5" | 196" | 223.5" |
| Height of Columns | 99.5" front / 93.5" rear | | 93.5" | |
| Width of Runways | 20" | | | |
| Height of Runways | 7" | | | |
| Width Btw. Runways | 43" | | 40" / 43" | |
| Air Supply Required | 90-120 psi | | | |
| Motor / Voltage | 2HP, 208v-230v, 60Hz, 1Ph | | | |
| Speed or Rise | 85 s | | | |
| Min. Recomm. Bay Size | 12' x 24' | 12' x 26' | 12' x 24' | 12' x 26' |
| ALI/ETL Certified | √ | √ | √ | √ |
| Colors Available | | | | |

*3-phase upgrade is available for purchase

www.challengerlifts.com
1-800-648-5438